

Palm Grip B32



The Palm Grip B32 has different equipment options for many requirements. It is compatible with our Multi-Axis Controller or mounted on hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data




Operating temperature	-40°C to +85°C
Degree of protection	Control element up to IP67
Contact complement	1,5A 24 V DC 13 (*1 0,1A 24 V DC13)




		Example					
		B32L	-2D	W	SE	S12	-X
Basic unit							
B32L	Palm Grip left						
B32R	Palm Grip right						
Digitale actuating element							
D	Push Button KDA21 *1 Colour: red, black, yellow, green, blue, white, orange						
HD	Hall-Push Button (see page 151)						
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, white Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R						
SE	Sensor Button capacitive with external control electronics						
S	Sensor Button capacitive without external control electronics (Consistent with V85 / VV85 with interface E1xx to E6xx, E907 and V25/V27 with interfaces E3xx + E4xx+E907)						
Analog actuating element							
S12	Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 146)						
S16	Thumbwheel, output 0,5...2,5...4,5 V inverse dual (see page 149)						
V21	Mini-Joystick, output 0,5...2,5...4,5 V inverse dual (see page 137)						
HK	Hall-Cross Switch (see page 143)						
Special model							
X	Special / customer specified						

B32


Push button
installed Pos. 1 - 8, 11 - 13
Rocker switch
installed Pos.9

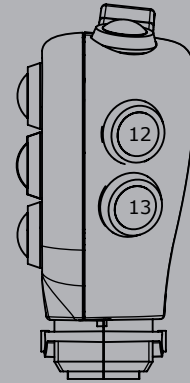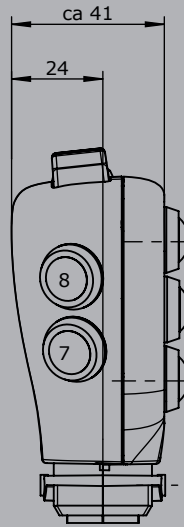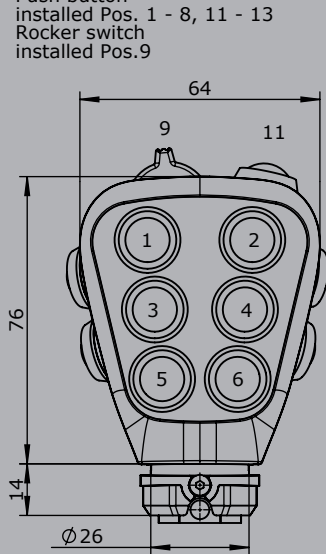


Push button
installed Pos. 1 - 8, 12 + 13
Rocker switch lengthwise
installed Pos. 10

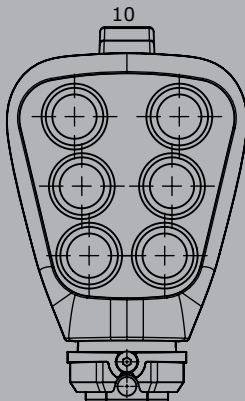


Rocker switch crosswise
installed Pos. 10

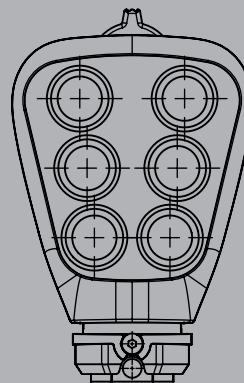

Edition:
Multi-axis controller V21
installed Pos. 1/3
(Pos. 9 - 11 not available)



Edition:
Rocker switch
installed Pos. 5/6



Edition:
Rocker switch
installed Pos.1/3 + 2/4
(Pos. 9 - 11 not available)

